



## POMPA PER VUOTO LUBRIFICATA AD INIEZIONE D'OLIO OIL INJECTION LUBRICATED VACUUM PUMP

# N120



### SPECIFICHE - SPECIFICATIONS

			50 Hz	60 Hz
Portata **	Pumping speed**	(m <sup>3</sup> /h)	100	120
Vuoto finale (Ass.)	Ult.vacuum (Abs)	(mbar)	10	10
Rumorosità media	Noise level	(dB)	73	73
Peso max.	Max.weight	(Kg)	35	35

(\*\* CON MOTORE A 4 POLI – WITH 4 POLES MOTOR) Salvo modifiche tecniche - We reserve the right to alter technical information.


**BGS GENERAL S.r.l.**

Via ZIBIDO, 3 - 20080 ZIBIDO SAN GIACOMO Mi Italia - Tel. +39.02.90.00.50.69 r.a. - Fax. +39.02.90.00.57.75

E-mail : [bigesse@bigesse.it](mailto:bigesse@bigesse.it) - Internet: <http://www.bigesse.it>

**DIMENSIONI - DIMENSIONS**

(mm)	
A	356
B	260
C	260
D	150
E	45
F	24
G	134
H	37
K	167
L	166.5
Øa	1"G
Øm	1"G
Øf	13
X	120
Y	180
W	170

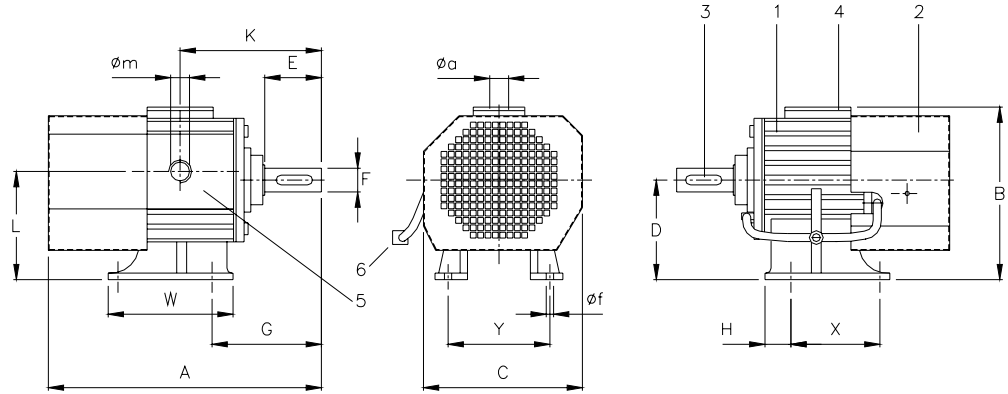


Salvo modifiche tecniche - We reserve the right to alter technical information.

1	Corpo pompa	Pump	
2	Carter ventola	Fan casing	
3	Sede chiavetta	Key housing	8x35 mm
4	Attacco aspirazione	Suction inlet	1"G
5	Piastra mandata	Delivery plate	1"G
6	Attacco lubrificazione	Lubrication piping	Ø 8-6 mm

**PRESTAZIONI - PERFORMANCE CURVE**

**N120 (10 mbar)**

**50 Hz / 60 Hz**

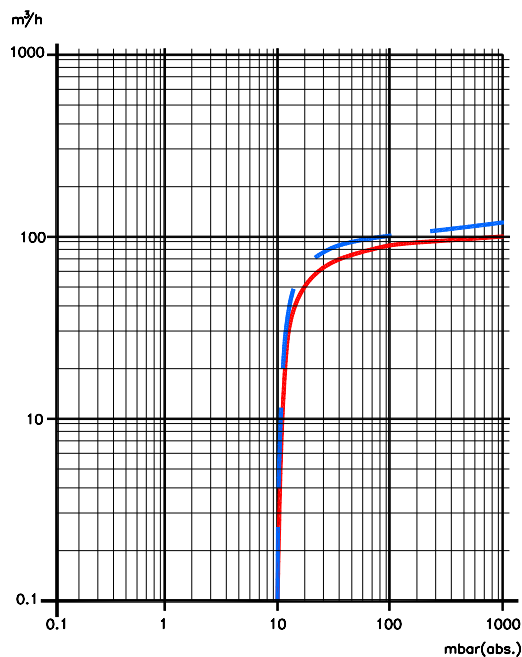

**BGS GENERAL S.r.l.**

Via ZIBIDO, 3 - 20080 ZIBIDO SAN GIACOMO Mi Italia - Tel. +39.02.90.00.50.69 r.a. - Fax. +39.02.90.00.57.75  
 E-mail : [bigiesse@bigiesse.it](mailto:bigiesse@bigiesse.it) - Internet: <http://www.bigiesse.it>